



greenlux
cost reduction LED lighting

Slim 01 Ceiling Mounted & Suspended LED Batten



- Super slim & elegant design
- Internal driver & external driver options
- Creating a brilliant lighting atmosphere
- Ceiling mounted & suspended installations
- Seamlessly linkable option
- Anti-glare, low heat generation
- High quality SMD chipset
- High lumen output at 110lm/W
- High quality aluminum profile with opal diffuser, excellent cooling effect
- Triac Dimmer available
- IP20 Rated
- Applications offices, convention centres, hotels, large retail stores, schools & hospitals etc.



Specifications


Colour Range	3000-5700K
Input Voltage	AC 100 ~ 240V
Power Factor	>0.9
Beam angle	120°
CRI	>80
Driver	Class II SAA

Housing Material Aluminum

Housing Color White / Black / Silver


Dimensions (mm)	Power	Lumens	
	20W	2280W	600*90*30
	30W	3450W	900*90*30
	40W	4680W	1200*90*30





SUPER SLIM CONSTRUCTION AND SUPERIOR CAPABILITY

aluminium profile body for good thermal dissipation, surface color treatment is customizable

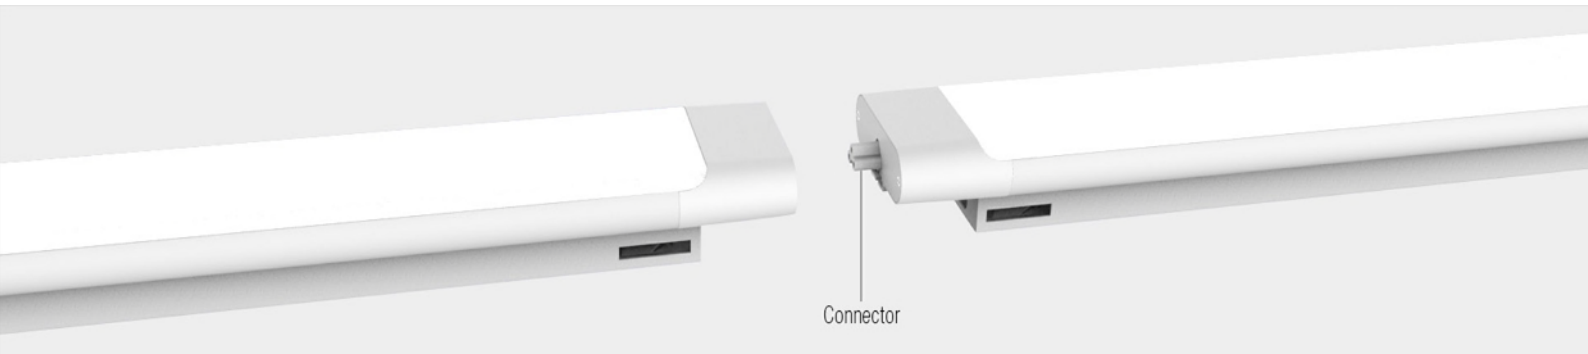

SEAMLESSLY LINKABLE



ELEGANT DESIGN

External Driver



Internal Driver








greenlux
cost reduction LED lighting

Slim 01 Ceiling Mounted & Suspended LED Batten

Dimensions & Photometrics

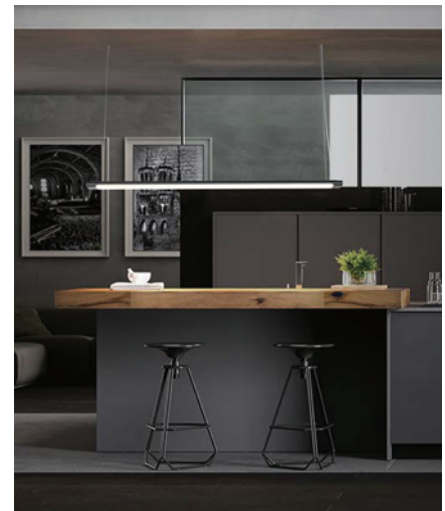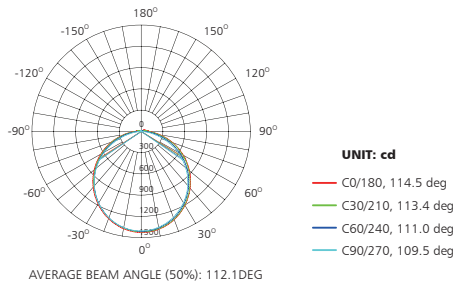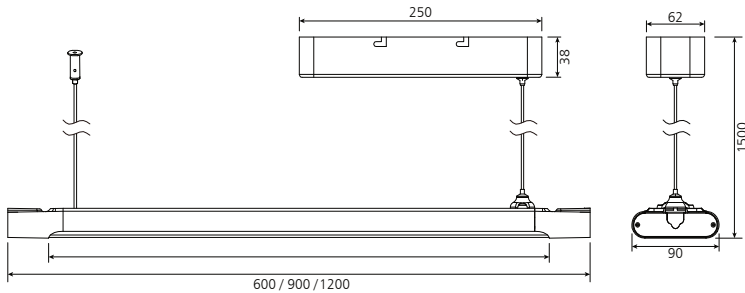

Model#	Dimensions (mm)	Beam Angle	CCT	Lumens	Output	LED
GUSLI-20W-01	600*90*30	120°	3000-5700k	2280	550mA	SMD
GUSLI-30W-01	900*90*30	120°	3000-5700k	3450	800mA	SMD
GUSLI-40W-01	1200*90*30	120°	3000-5700k	4680	1050mA	SMD

