



**greenlux**  
cost reduction LED lighting

# Rina Series Recessed LED Downlight

Available in Multiple Wattage  
80% lumen maintenance at 50,000 hours



**A**



**B**

- No UV or IR rays. No mercury
- CRI 80 & CRI 90 options
- High quality Bridgelux COB chips with high luminous flux
- Aluminum profile provides excellent thermal dissipation
- High quality die-casting aluminum alloy housing with powder coating
- Triac / Dali / 0-10V Dimmer option available
- Superb dimming effect
- Applications include restaurants, offices, shops, schools, hotels & households. Also widely used for public areas such as stairways, lobby, receptions & corridors.

## Specifications

<b>Colour Range</b>	2700-6500k
<b>Power Consumption</b>	7W / 10W
<b>Lumen</b>	630 / 900lm
<b>Input Voltage</b>	AC 100-240V

<b>Beam angle</b>	24° / 36° / 48°
<b>CRI</b>	80 & 90 (options)
<b>Power Factor</b>	>0.95
<b>Chipset</b>	Bridgelux COB
<b>Driver</b>	Class II
<b>Dimmable (option)</b>	Triac / 0-10V / DALI

## Dimensions & Materials

		<b>Cutout</b>
<b>Product Dimensions (mm)</b>	A Ø78*107	Ø70
	B Ø100*110	Ø92
<b>Housing Material</b>	Die-casting Aluminum	



9/331 Ingles Street  
Port Melbourne VIC 3207 Australia

T **1300 650 625**  
sales@greenlux.com.au

[www.greenlux.com.au](http://www.greenlux.com.au)



greenluxlighting



GreenluxLED






**greenlux**  
cost reduction LED lighting

# Rina Series Recessed LED Downlight

Available in Multiple Wattage  
80% lumen maintenance at 50,000 hours

## Dimensions & Photometrics

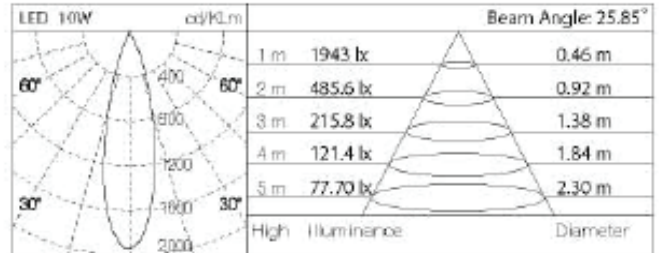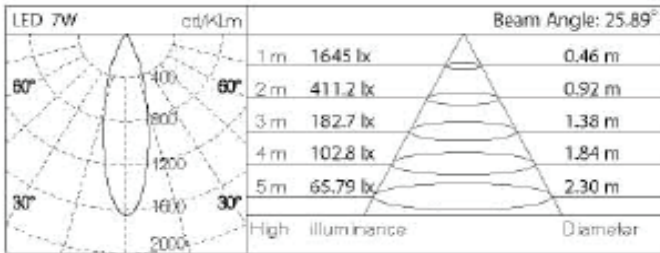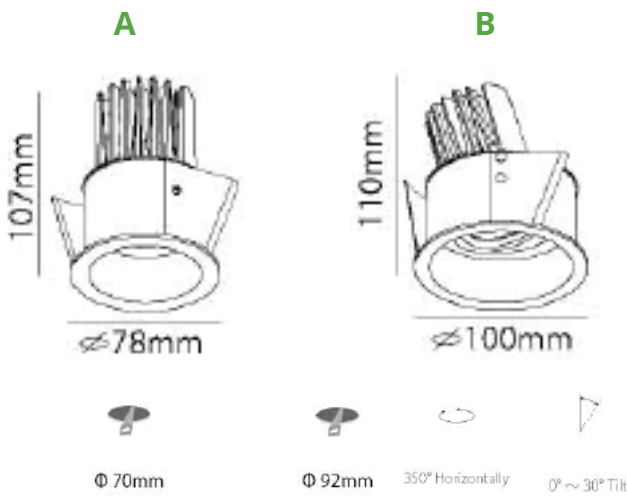

Model#	Dimensions (mm)	Cutout (mm)	Beam Angle	CCT (k)	Lumens	Wattage	LED	Dimmer (option)
<b>A</b>								
GJRIN-7W-A	Ø78*107	Ø70			630	7W		
GJRIN-10W-A	Ø78*107	Ø70		3000k	900	10W		Triac
<b>B</b>								
			26°/36°/48°	4000k			COB	0-10V
GJRIN-7W-B	Ø100*110	Ø92		5000k	630	7W		DALI
GJRIN-10W-B	Ø100*110	Ø92		6000k	900	10W		