
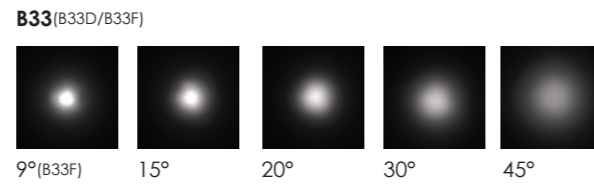



Crest RS 130

Surface Mounted LED Down Light IP65




LED Colour Temperature	Optics
<ul style="list-style-type: none"> 3000K 4000K 5000K 	 B33(B33D/B33F) L0109F023YH 9° L0115D023YH 15° L0120D023YH 20° L0130D023YH 30° L0145D023YH45°



LED Colour Temperature	Optics
<ul style="list-style-type: none"> 3000K 4000K 5000K 	 R27 R0110C075XL 10°




Outer Dimensions Unit:mm

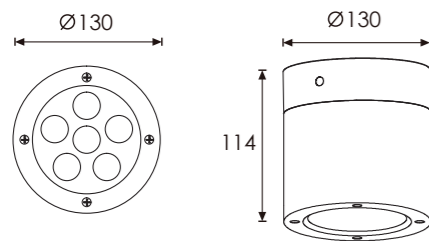

Material specifications

Housing Material	Extruded aluminum alloy #6063;
Painting	Powder coating ,T= 60-80 um./Adhesion of ISO class 1/ASTM class 4B
Reflector	Optical reflector. efficiency≥85%
LED	NICHIA
Power Cable	H05RN-F 2X1.0mm ² L=0.3m(low voltage) H05RN-F 3X1.0mm ² L=0.3m(High voltage)
Operating temperature	-20°C~40°C

Outer Dimensions Unit:mm

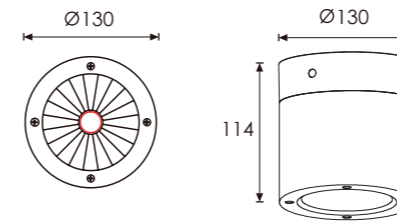


Material specifications

Housing Material	Extruded aluminum alloy #6063;
Painting	Powder coating ,T= 60-80 um./Adhesion of ISO class 1/ASTM class 4B
Reflector	Optical reflector. efficiency≥85%
LED	NICHIA
Power Cable	H05RN-F 2X1.0mm ² L=0.3m(low voltage) H05RN-F 3X1.0mm ² L=0.3m(High voltage)
Operating temperature	-20°C~40°C

Housing Color Option



Housing Color Option

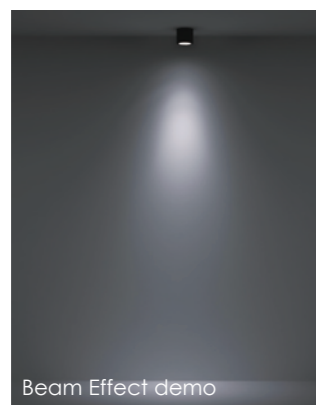

Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
GKB8CJ0657	6×2W	B33D	30°	24V DC 120/240	2.4V = 562 120V = 100 240V = 56	2.4V = 13.5 120V = 12.0 240V = 12.2	Cool white =830 Warm white =681	06

Item	Light source	Reflector	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
GKR8CJ0127	1×8W COB	R27	35°	24V DC 120/240	2.4V = 411 120V = 88 240V = 50	2.4V = 9.8 120V = 10.8 240V = 10.8	Cool white =850 Warm white =896	06

