



Asymmetrical Recessed LED Stair Light and Wall Light


- LED Colour Temperature
 - 2000K
 - 3000K
 - 6000K
- Optics
 - N/A



GKB1ACR0102

GKB1ACS0102


Outer Dimensions

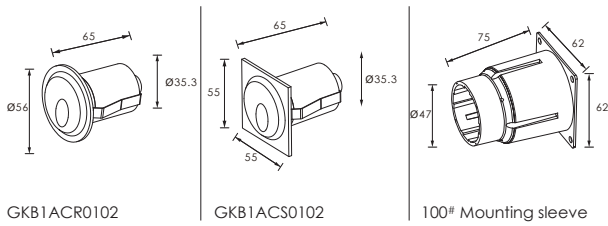

Material specifications

Housing&Front cover	12 # Die-casting aluminum T=20-25µm. Adhesion of ISO class 1/ ASTM class 4B high temperature painting
Light Source	OSRAM
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.3m (low voltage)
Mounting sleeve	ABS 100 #
Dimmable Support	Triac PWM 1-10V Dali

Lighting Effect demo



Wall recessed

Front Cover Color Option

Sanded Brown RAL8019	Sanded Black RAL9005	Silver Resistant Paint RAL9006





Installation with clips embedded into sleeve, fix on the concrete wall



Installation with clips directly

Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
GKB1ACR0102	1×2W	L0180C010AR	70°	24V DC	100	2.4	Cool white=51 Warm white=46	10
GKB1ACS0102	1×2W	L0180C010AR	70°	24V DC	100	2.4	Cool white=51 Warm white=46	10

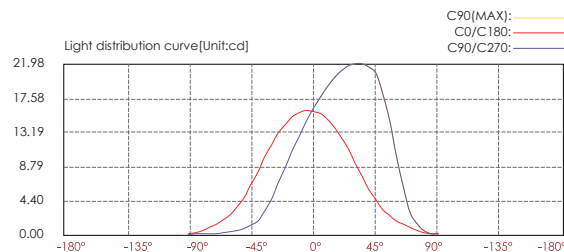

Center beam LUX	Beam width Y	Beam width H
2m 3.96 LUX	3.00m	2.80m
4m 0.99 LUX	6.00m	5.60m
6m 0.44 LUX	8.90m	8.40m
8m 0.25 LUX	11.9m	11.2m
10m 0.69 LUX	14.9m	14.1m
12m 0.11 LUX	17.9m	16.9m

Ver.Spread:73.5 Horiz.Spread:70.2