

Giza DR0102




Asymmetrical Recessed LED Stair Light and Wall Light

LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics


- N/A

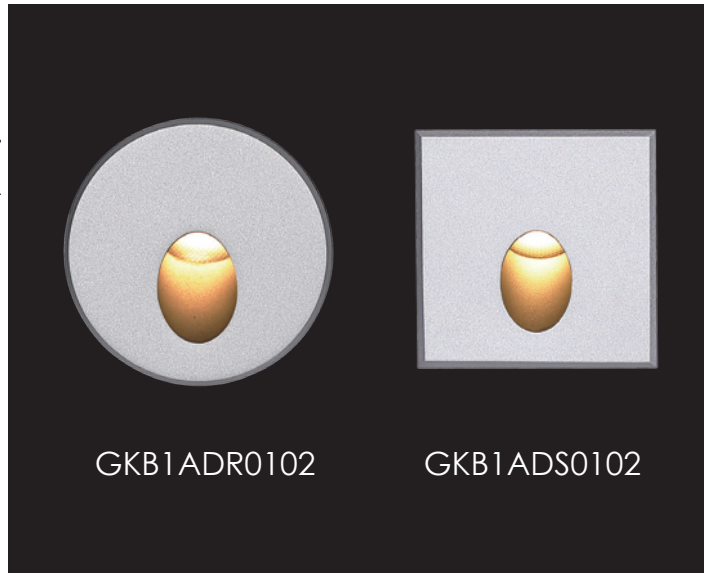

GKB1ADR0102

GKB1ADS0102


Outer Dimensions

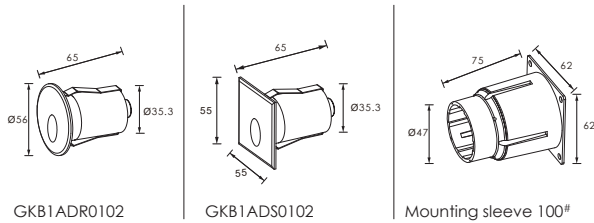

Material specifications

Housing	12" Die-casting aluminum T=20-25µm. Adhesion of ISO class 1/ ASTM class 4B high temperature painting
Front cover	12" Die-casting aluminum
Light Source	OSRAM
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.3m (low voltage)
Mounting sleeve	ABS 100#
Dimmable Support	Triac PWM 1-10V Dali


Beam effect demo



Wall recessed



Installation with clips embedded into sleeve, fix on the concrete wall





Installation with clips directly

Front Cover Color Option

Sanded Brown RAL8019	Silver Resistant Paint RAL9006	Sanded Black RAL9005

Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
GKB1ADR0102	1×2W	L0180C010AR	50°	24V DC	100	2.4	Cool white =54 Warm white =49	10
GKB1ADS0102	1×2W	L0180C010AR	50°	24V DC	100	2.4	Cool white =54 Warm white =49	10

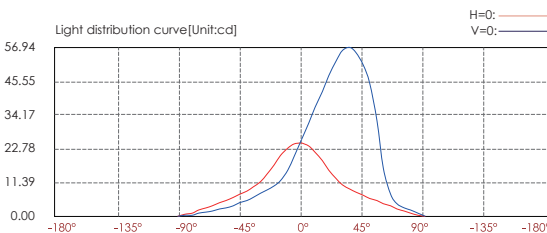

Center beam LUX	Beam width V	H
6.20 LUX	1.6m	2.00m
1.55 LUX	3.2m	4.10m
0.69 LUX	4.8m	6.10m
0.39 LUX	6.4m	8.10m
0.24 LUX	8.0m	10.1m
0.17 LUX	9.6m	12.2m

Ver.Spread:43.7 Horiz.Spread:53.8