



greenlux
cost reduction LED lighting

Ray Series 02 LED Street Light

Available in Multiple Wattage
80% lumen maintenance at 50,000 hours

- Class II electric insulation
- Double photomnum diffuser technology
- Supper white toughened glass
- Sealed lamp housing
- High quality die-casting aluminium housing
- High lumen output 100lm/W
- High efficiency Cree LED chipset
- Photocell sensor available
- IP65 Rated for external use
- Applications include streets, gardens, parks, and commercial sites

Specifications

Colour Range	3000 ~ 6500k
Power Consumption	40W / 50W / 70W / 90W
Product Dimensions (mm)	530*250*66 (L*W*H)
Lumen	4350lm ~ 8730lm
Input Voltage	AC 100-277V 50/60Hz
Beam angle	160°
CRI	>75
Power Factor	>0.95
Chipset	Cree
Pipe Diameter	48mm
Driver	Mean Well / Philips
Housing Color	Black / Grey



IES

LM80

RCM

SAA

IP65

TUV

CE




5 Yrs
Warranty



greenlux
cost reduction LED lighting

Ray Series 02 LED Street Light

Dimensions & Photometrics

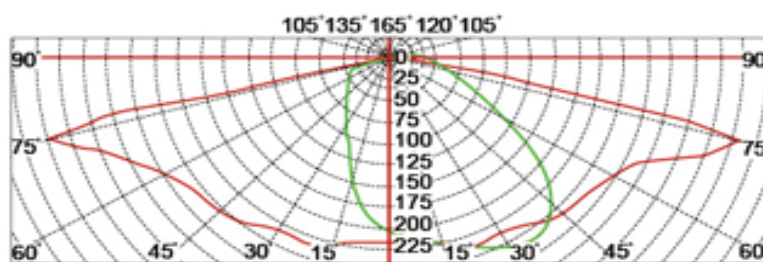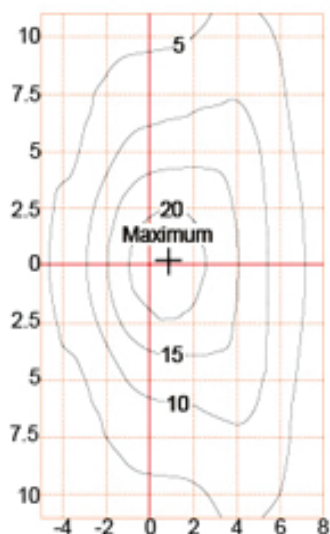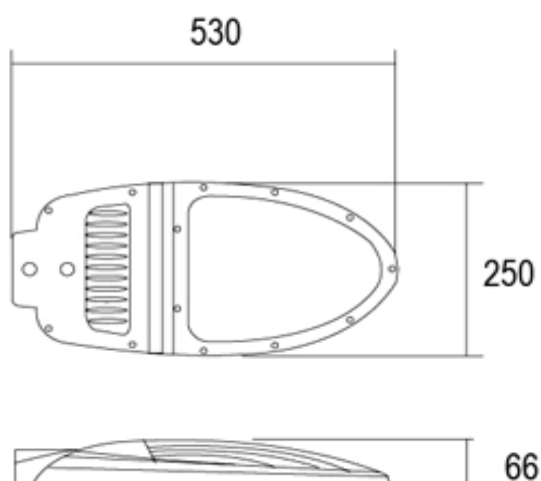

MODEL	Beam Angle (°)	Wattage (W)	Voltage (V)	LED	CCT (k)	Lumen	Pipe Diameter (mm)	Size (mm) (LxWxD)	Surface Colour
GYRAY-40W-02	160	40W	100/277	Cree	3000-6500	4350	48	530*250*66	Black Grey
GYRAY-50W-02		50W				5500		530*250*66	
GYRAY-70W-02		70W				7300		530*250*66	
GYRAY-90W-02		90W				8730		530*250*66	