



greenlux
cost reduction LED lighting

Circus Series 01 LED Dimmable Pendant Light

Suspended / Surface Mounted
/ Recessed Installations



Specifications

Installation	Suspended / Recessed / Ceiling Mounted
Colour Range	3000 ~ 5000k
Chipset	SMD
Power Consumption	18W ~ 45W
Lumen	95lm/W
Input Voltage	100 ~ 240V AC
Beam angle	120°
CRI	>80 / >90
Power Factor	>0.9
Dimmable	Triac Dimmer

Dimensions & Material

Product Dimension (mm)	Ø300 * 12 Ø400 * 12 Ø500 * 12 Ø600 * 12
Housing Material	Aluminium Housing
Housing Color	White



ELEGANT DESIGN

creates soft lighting effect



Recessed into ceiling



Suspending



LIGHTING AND SPACE





greenlux
cost reduction LED lighting

Circus Series 01 LED **Dimmable** Pendant Light






greenlux
cost reduction LED lighting

Circus Series 01 LED **Dimmable** Pendant Light

Dimensions

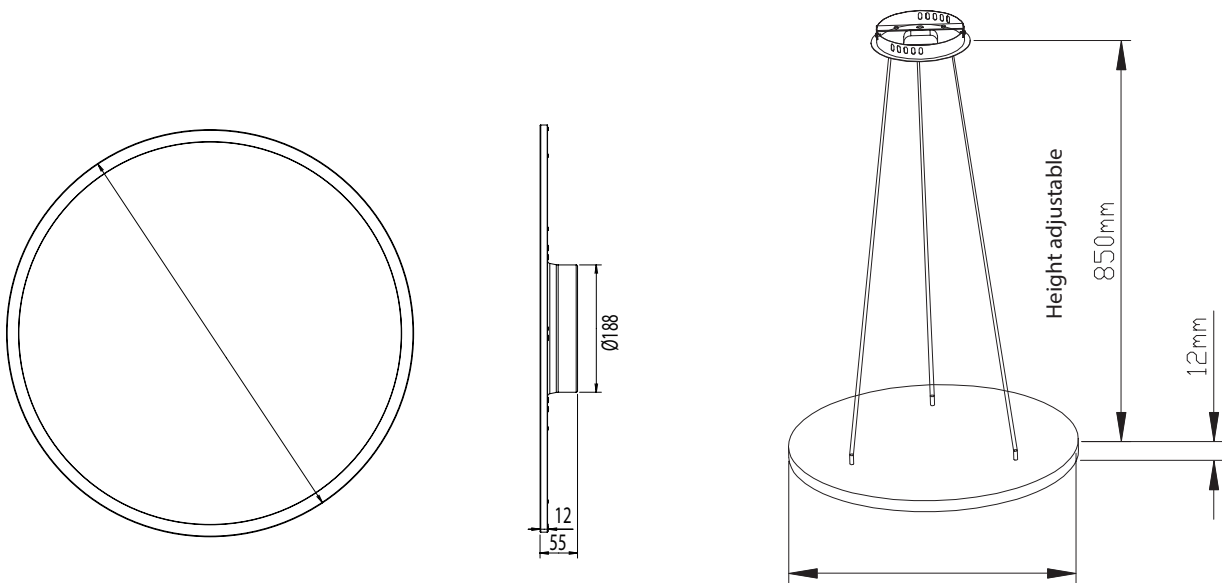

Model	Dimensions (mm)	Power	Power Factor	Lumen (±5%)	Beam angle	CCT	CRI	Dimmable
GUCIR-18W-3012-01	300 * 12	18W	≥0.9	1560	120°	3000K ~ 5700K	≥80 / 90	Yes
GUCIR-25W-4012-01	400 * 12	25W	≥0.9	2170	120°	3000K ~ 5700K	≥80 / 90	Yes
GUCIR-35W-4012-01	400 * 12	35W	≥0.9	3080	120°	3000K ~ 5700K	≥80 / 90	Yes
GUCIR-30W-5012-01	500 * 12	30W	≥0.9	2460	120°	3000K ~ 5700K	≥80 / 90	Yes
GUCIR-35W-5012-01	500 * 12	35W	≥0.9	2900	120°	3000K ~ 5700K	≥80 / 90	Yes
GUCIR-35W-6012-01	600 * 12	35W	≥0.9	3040	120°	3000K ~ 5700K	≥80 / 90	Yes
GUCIR-45W-6012-01	600 * 12	45W	≥0.9	3600	120°	3000K ~ 5700K	≥80 / 90	Yes