



Cus Family

Cus Recessed

Cus Surface Mounted

Cus Pendant



8W

GSCUS-8W-RE



3*8W

GSCUS-3*8W-R-SM



Cus LED Recessed Down Light



230mA 36V, CRI>90, SDCM<3

FINISHING:
Textured White
Textured Black
Silver Grey

IP21

LIGHT DISTRIBUTION for 2700K
medium 36°

h(m)	E(lx)	ø(m)
1	1050	ø0.62
2	262.6	ø1.25
3	116.7	ø1.88
4	65.65	ø2.50
5	42.02	ø3.13



Cutout: 62mm
 5-25mm

Baffle

Photometric Info

24D
36D



Cus R LED Surfaced Mounted Down Light


230mA 36V, CRI>90, SDCM<3
(incl. LED converter)

FINISHING:
Textured White
Textured Black
Silver Grey

IP21

LIGHT DISTRIBUTION for 3000K
medium 36°

h(m)	E(lx)	ø(m)
1	4342	ø0.64
2	1074	ø1.29
3	472.2	ø1.93
4	261.0	ø2.58
5	161.2	ø3.22

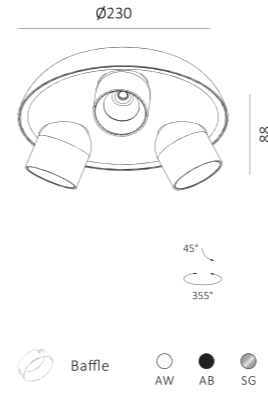



Baffle

Supplied with triac dimmable LED converter

Photometric Info

24D
36D



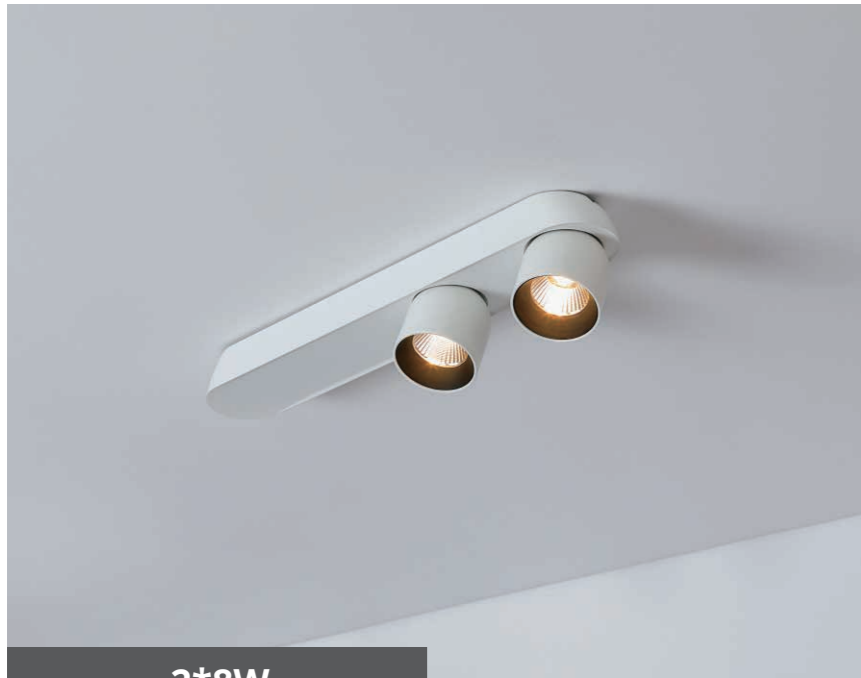

2*8W

GSCUS-2*8W-L-SM




4*8W

Cus P LED Pendant Light
GSCUS-4*8W-P



GSCUS-4*8W-L-SM

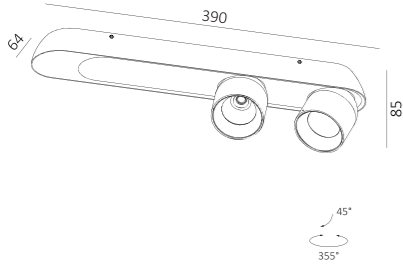

Cus L LED Surface Mounted Down Light

230mA 36V, CRI>90, SDCM<3
(incl. LED converter)

FINISHING:
Textured White
Textured Black
Silver Grey

IP21

LIGHT DISTRIBUTION for 3000K
medium 36°



h(m)	E(lx)	ø(m)
1	2895	ø0.63
2	714.4	ø1.28
3	311.0	ø1.93
4	178.1	ø2.57
5	109.0	ø3.22

Supplied with triac dimmable LED converter



Photometric Info

24D
36D

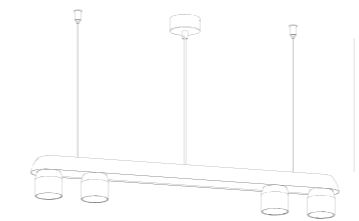


Cus L LED Surface Mounted Down Light

230mA 36V, CRI>90, SDCM<3
(incl. LED connector)

FINISHING:
Textured White
Textured Black
Silver Grey

IP21

Supplied with triac dimmable LED converter

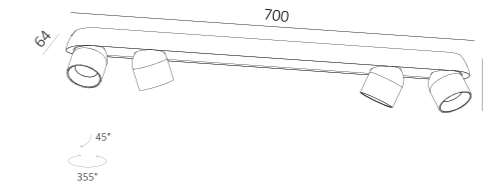

Photometric Info

24D
36D

