



greenlux
cost reduction LED lighting

Flexi Series **2835** LED Strip Light **Classic**



- High efficiency and luminous LED strip light
- Available in multiple wattages and lengths
- 3M VHB adhesive tape for easy installation
- Double layer pure copper 2oz PCB
- High lumen efficiency 95lm/W
- IP20 / IP40 / IP65 / IP68 rating options
- Bright and even light output
- High quality 2835 SMD chipset
- 120° Beam Angle
- 12V or 24V DC Input Voltage options
- Minimal heat generation
- Dimming options
- Available in 5m/roll as standard
- Accessories included
- Application includes offices, shopping centres, hotels, restaurants, museums, public areas & households

Specifications

Colour Range	3000-6000k
Power Consumption (W/m)	7.2W / 14.4W / 28.8W
Input Voltage	12V / 24V DC
LED Quality	30 / 60 / 120
IP Rating	IP20 / IP64 / IP65 / IP68
CRI	>80
Beam angle	120°
Chipset	SMD 2835
Length	3m or 5m/roll (Standard)



9/331 Ingles Street
Port Melbourne VIC 3207 Australia

T **1300 650 625**
sales@greenlux.com.au

www.greenlux.com.au






greenlux
cost reduction LED lighting

Flexi Series 2835 LED Strip Light Classic

Accessories

Model								
2835	✓	✓	✓			✓	✓	✓


Note: If you want to order UL version, the wire could be different




IP64	Slim PU Glue Potted		
IP65	PU Glue Potted		
IP65	Silicon Sleeved		
IP68	Silicon Extrusion and Glued		

Dimensions


7.2W 12V




7.2W 24V

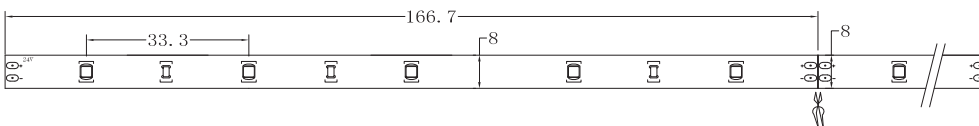


14.4W 12V




14.4W 24V

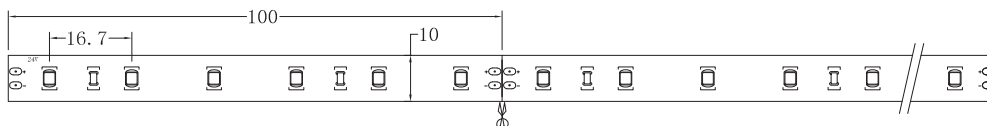

28.8W 12V

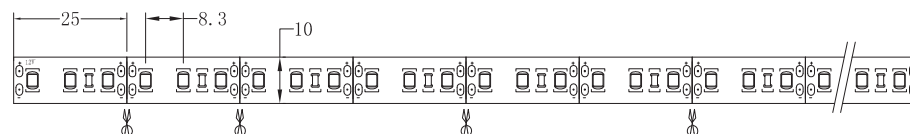

28.8W 24V

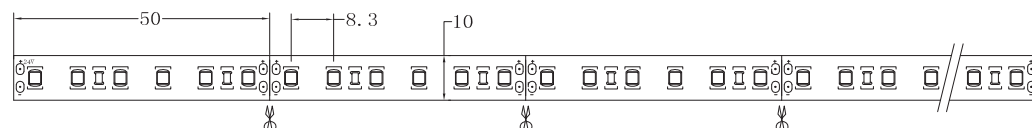





greenlux
cost reduction LED lighting

Flexi Series 2835 LED Strip Light Classic


Installation

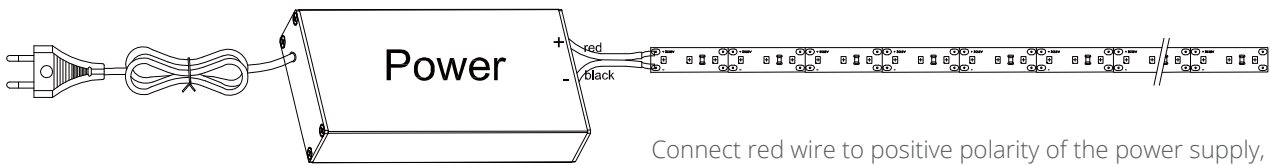

Connect red wire to positive polarity of the power supply, then connect black wire to negative polarity

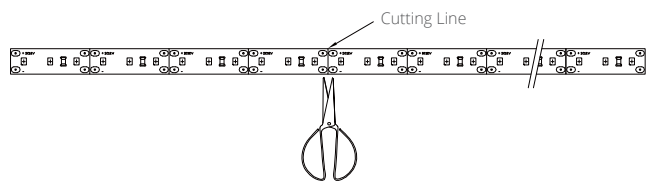

Strip may be cut to desired length according to the cutting line

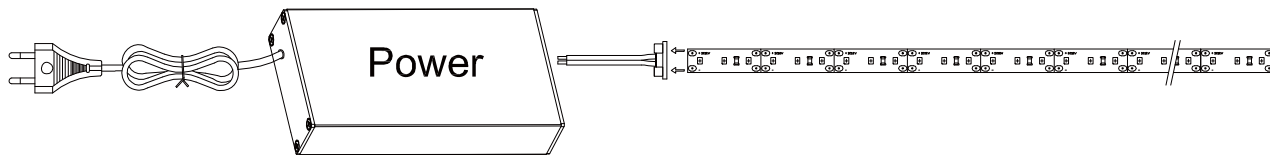

Cutted Strip could be connected via accessory connector, then connected to power supply

Model

Model	Colour	Lumen	LED Type	LED Qty. (leds/m)	Dimensions (W*L mm)	DC Voltage (V)	Wattage (W/m)	CRI	IP
GSFLE-7.2W-2835-CL	5500-6500k	710	SMD 2835	30	8*5000	12/24	7.2	80	20/64/65/68
	3850-4500k	660							
	2700-3200k	620							
GSFLE-14.4W-2835-CL	5500-6500k	1380	SMD 2835	60	10*5000	12/24	14.4	80	20/64/65/68
	3850-4500k	1250							
	2700-3200k	1230							
GSFLE-28.8W-2835-CL	5500-6500k	2760	SMD 2835	120	10*3000	12/24	28.8	80	20/64
	3850-4500k	2710							
	2700-3200k	2390							