



greenlux
cost reduction LED lighting

Flexi Series **2835** LED Strip Light **High Lumen**



- High efficiency and luminous LED strip light
- High lumen efficiency 140lm/W
- Available in multiple wattages and lengths
- Customised cuttable strip, 4pcs LEDs for 12V DC, 8pcs LEDs for 24V DC
- 3M VHB adhesive tape for easy installation
- Double layer pure copper 2oz PCB
- IP20 / IP40 / IP65 / IP68 rating options
- Bright and even light output
- High quality 2835 SMD chipset
- 120° Beam Angle
- 12V or 24V DC Input Voltage options
- Minimal heat generation
- Dimming options
- Accessories included
- Application includes offices, shopping centres, hotels, restaurants, museums, public areas & households

Specifications

Colour Range	3000-6000k
Power Consumption (W/m)	5.8W / 11.5W / 21.6W
Input Voltage	12V / 24V DC
LED Quality	32 / 62 / 120
IP Rating	IP20/IP64/IP65/IP68
CRI	>80
Beam angle	120°
Chipset	SMD 2835
Max. Length	3m
Min. Cut Length	33.3mm

IES

IP20

LM80

SAA

RCM

TUV

CE

3 Yrs
Warranty

9/331 Ingles Street
Port Melbourne VIC 3207 Australia

T **1300 650 625**
sales@greenlux.com.au

www.greenlux.com.au

 greenluxlighting









 GreenluxLED




greenlux
cost reduction LED lighting

Flexi Series 2835 LED Strip Light High Lumen

Accessories

Model								
2835	✓	✓	✓			✓	✓	✓

Dimensions

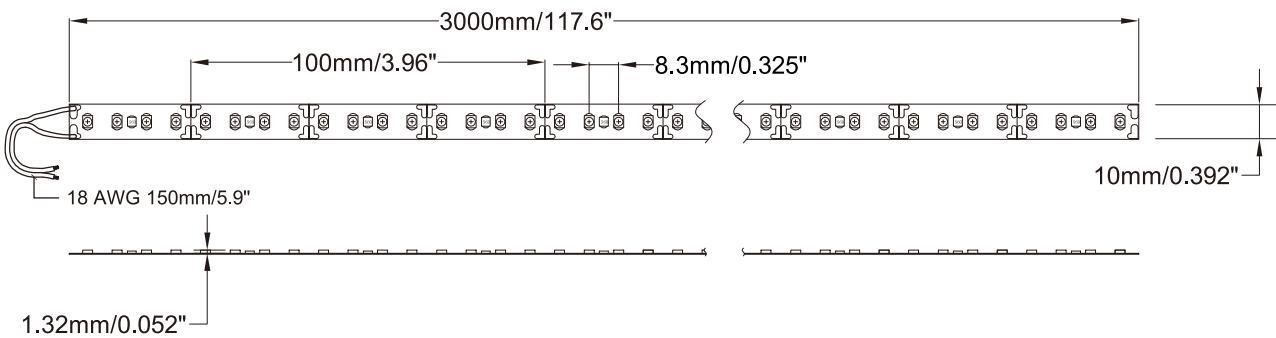

Model	Colour	Lumen	LED Type	LED Qty. (leds/m)	Dimensions (W*L mm)	DC Voltage (V)	Wattage (W/m)	CRI	IP
GSFLE-5.8W-2835-HL	5500-6500k	760	SMD 2835	32	8*3000	12/24	5.8	80	20/64/65/68
	3850-4500k	740							
	2700-3200k	660							
GSFLE-11.5W-2835-HL	5500-6500k	1530	SMD 2835	62	10*3000	12/24	11.5	80	20/64/65/68
	3850-4500k	1490							
	2700-3200k	1330							
GSFLE-21.6W-2835-HL	5500-6500k	2880	SMD 2835	120	10*3000	12/24	21.6	80	20/64
	3850-4500k	2800							
	2700-3200k	2500							